

# Protean™ HT Radio Remote Control

The Protean™ HT Radio Remote Control is the ideal radio for basic hoist and trolley control. It is economical, yet rugged and reliable for many applications. The HT Transmitter is shock resistant and uses two AA alkaline batteries.

## Protean™ HT Transmitter




701PROL6B-TX

### Transmitter Specifications

- NEMA 4 rated (IP65), shock resistant enclosure
- 4 two-speed buttons with detents: Up, Down, East, West
- Large mushroom E-stop switch
- Removable water-proof key.
- Range: Up to 330 feet
- Dimensions: 6.5H x 2.0W x 2.25D (165 x 51 x 57)

## Protean™ HT Receiver

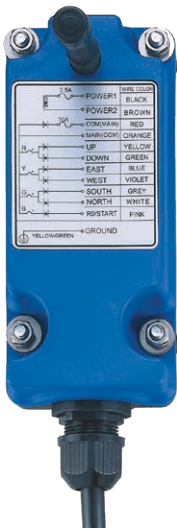

### Receiver Specifications

- Dimensions: 6.5H x 3.0W x 2.4D (165 x 76 x 60)
- NEMA 4 rated (IP65), shock resistant enclosure
- Pre wired with 6 ft (1.83 meters) of cable
- Shock-resistant mounting - four bolts with stock absorbers
- Power Options: DC Type: 12 ~ 24 Volts DC  
AC: 24V/48V, 48V/110V, 110V/220V, plus or minus 10%, 50/60 Hz.  
Default is 110/220 VAC, 110 VAC selected
- Relay Ratings: 10A @ 125 VAC  
5A @ 250 VAC  
8A @ 30 VDC

## Protean™ HT Radio Kit

Input Power	No. of Transmitters	Part No.
AC	2	700PRO6DHT
DC	2	700PRO6DHT-DC
24 VAC	2	700PRO6DHT-24

**Please Note:** For spare transmitter orders, we will need the original serial number for proper matching of transmitter to receiver.  
Protean Series radios will also need Channel Number 1-38 specified at time of order.